

Special Features

- ▲ VANDAL RESISTANT DESIGN
- ▲ INTEGRAL SHROUD
- ▲ HYGIENIC ONE PIECE CONSTRUCTION
- ▲ EASILY AND QUICKLY INSTALLED
AT ADULT OR JUNIOR HEIGHT
- ▲ OPTIONAL WHITE **Enviro-Glaze** FINISH

Description

The bowl urinal is easily wall mounted at adult or junior height and incorporates an integral shroud that conceals the waste outlet and trap area. Designed for exposed or concealed pipework, the urinal is available in a single bowl or range form complete with an automatic cistern and feed pipes.

Construction

The urinal is manufactured in one piece without joints or crevices from grade 304 stainless steel, with all exposed surfaces polished to a satin finish. The shaped bowl and spreader assembly ensures an efficient spread of flushing water over the internal surface.

The integral shroud that conceals the waste outlet and trap can be easily cut away, during installation, to suit locations with exposed surface mounted waste pipework.

Available as a single bowl or in a range form of 1, 2 or 3 urinals. The bowl urinal ranges are supplied with an automatic cistern, flushpipe and feedpipes. Each urinal is supplied with a flush grated waste fitting, spreader assembly and water inlet connector.


Options

- ▲ Stainless steel wall divider panel.
- ▲ Stainless steel automatic cistern
(see catalogue section 1 - product code 131).
- ▲ White **Enviro-Glaze** finish.



Technical Specification: Bowl Urinal

5 Brearley Court, Baird Road, Waterwells Business Park, Quedgeley, Gloucester GL2 2AF Tel: 01452 721211 Fax: 01452 721231 Web: www.acornpowell.co.uk

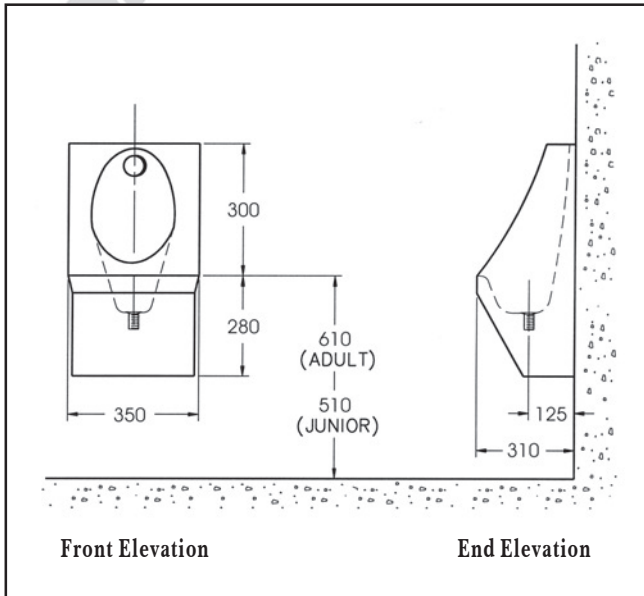

Quantity

The urinal is available as a single bowl only. Alternatively in range form of 1, 2 or 3 bowls.

Waste Outlet

All urinals are supplied with a 32 mm (1¼ in) BSP flush grated waste fitting.

Flushing System

All urinals are supplied with a chrome plated spreader assembly and water inlet fitting to suit 15 mm diameter pipework. The water inlet connection to the flushpipe is top entry for an exposed surface mounted cistern (see Fig. 1) or back entry for a concealed duct mounted cistern (see Fig. 2).

Flushpipe

All urinal ranges are supplied with 22 mm diameter stainless steel flushpipes, feedpipes, wall fixing clips and all necessary pipe fittings. The length of each flushpipe allows for its cistern to be mounted at the maximum recommended height.

Cistern

All urinal ranges are supplied with a plastic automatic flushing cistern. Each cistern is complete with lid, syphon and petcock.

The recommended mounting height is 1800 mm minimum to 2000 mm maximum from the underside of the cistern to finished floor level.

Cistern Capacity

No of bowls	-Range of 1	-Range of 2	-Range of 3
Cisterns	-1 x 4.5 litre	-1 x 9.0 litre	-1 x 13.65 litre

Product Code Selection for Order or Quotation

1. Base Product Code

-072-bowl urinal

2. Quantity

-01-single -R1-range of 1
 -R2-range of 2 -R3-range of 3

3. Flushing System

-TE-top entry -BE-back entry

4. Options

-DP-divider panel (specify quantity) _____
 -131-stainless steel cistern
 -WG-white **Enviro-Glaze**

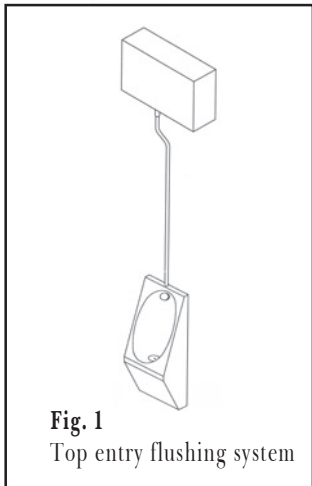


Fig. 1
Top entry flushing system

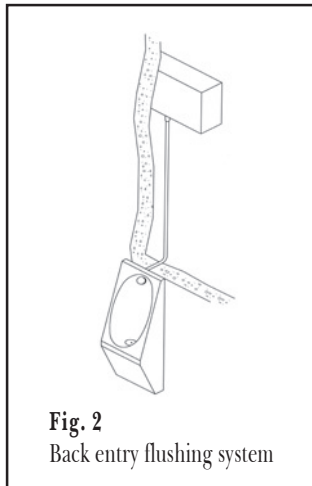


Fig. 2
Back entry flushing system