

### Special Features

- ▲ FACTORY ASSEMBLED FOR EASY, LOW COST INSTALLATION
- ▲ SPACE SAVING DESIGN
- ▲ INDIVIDUAL TIMED FLOW VALVES FOR WATER ECONOMY
- ▲ OPTIONAL **Enviro-Glaze** FINISH

### Description

The column shower provides the most economic and space saving solution to group showering facilities. Costly installation time is dramatically reduced as the shower is factory assembled with up to six individual timed flow control water outlets requiring only one supply connection. Support walls are not required as the column shower, when installed with the drain anchor base provided, is free standing offering virtually unobstructed lines of sight for easy shower room supervision. The column shower is ideal for poolside installations or shower facilities at leisure centres, sports clubs, camp sites, schools, colleges, military barracks and penal institutions. As an option to the standard stainless steel finish, the column shower is available in a range of **Enviro-Glaze** colours.

### Construction

The column shower is manufactured from heavy gauge grade 304 stainless steel, with all exposed surfaces polished to a satin finish. As an option, the shower can be supplied in a range of **Enviro-Glaze** colours.

The shower column incorporates a heavy duty base mounting flange with integral drain slots, a removable access panel held in position by security type screws and a circular soap tray.


The shower is supplied factory fitted with a fixed spray head and timed flow push button valve for each user together with a water supply manifold and all internal piping. Models are available to suit 4, 5 or 6 users. A cast iron drain anchor base, coated with a rust preventative, provides a secure mounting for the column. To prevent blockages the column shower is supplied with a dome grated drain cover.

### Operation

Each user has their own fixed spray head and push button timed flow valve which is adjustable to give between 5 and 60 seconds operation. The column shower is designed to connect to a single pipe, from below or above, supplying temperature controlled warm water. An optional overhead telescopic shroud is available to conceal pipework from above.

### Options

- ▲ **Enviro-Glaze** coloured finish.
- ▲ Stainless steel overhead telescopic pipe shroud.

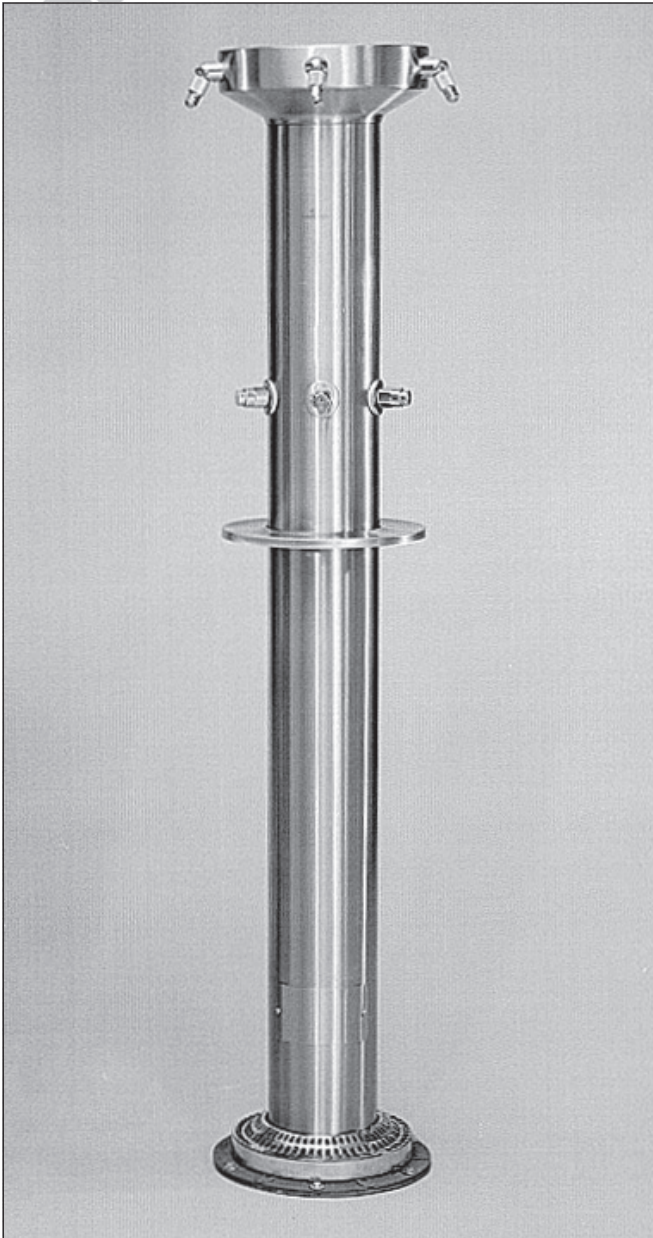

## Number of Users

The column shower is available to suit either 4, 5, or 6 users.

## Spray head, Shower valve and Fittings

The column shower is supplied, as standard, with the following:

Fixed vandal resistant spray head (one per user).

Push button timed flow valve adjustable to give between 5 and 60 seconds operation (one per user). Valve factory set at approximately 45 seconds.

Circular stainless steel self-draining soap tray.

Water supply manifold with single supply inlet of 19 mm (3/4 in) diameter copper pipe.

Cast iron drain anchor base with rust preventative coating and a 112 mm overall diameter vertical outlet spigot.

Dome grated drain cover.

## Water Supply and Pressure

A temperature controlled water supply is required for the column shower. The supply pipework should be a minimum of 28 mm diameter reducing in size within the column. For satisfactory operation a minimum water pressure of 1.2 bar g. is required at the point where the supply enters the column. For water pressures in excess of 8.0 bar g. a flow control or pressure reducing valve must be fitted.

## Product Code Selection for Order or Quotation

### 1. Base Product Code

621-column shower

### 2. Number of Users

4

5

6

### 3. Water Supply

BS-bottom

TS-top

### 4. Options

EG-Enviro-Glaze. Specify colour;

white

beige

pearl

tan

blue

green

mauve

yellow

OS-overhead pipe shroud ( top water supply only )

specify floor to ceiling height \_\_\_\_\_mm

For details of Enviro-Glaze please see separate data sheet at the beginning of this catalogue.

